

MAIN ACCESSORIES



Hydraulic power pack
with petrol, electric or diesel engine



VL 20,
speed and distance indicator



Triangle-guide
for cable Ø 55-140 mm




Pressure rollers device (only for DF6-H02)
small admitted cable Ø : 25 - 50 mm,
medium admitted cable Ø : 32 - 90 mm, or
large admitted cable Ø : 45 - 130 mm

PLUMETT

PUSH THE BOUNDARIES

SIMPLE SOLUTION FOR
SOLID CONSTRUCTION

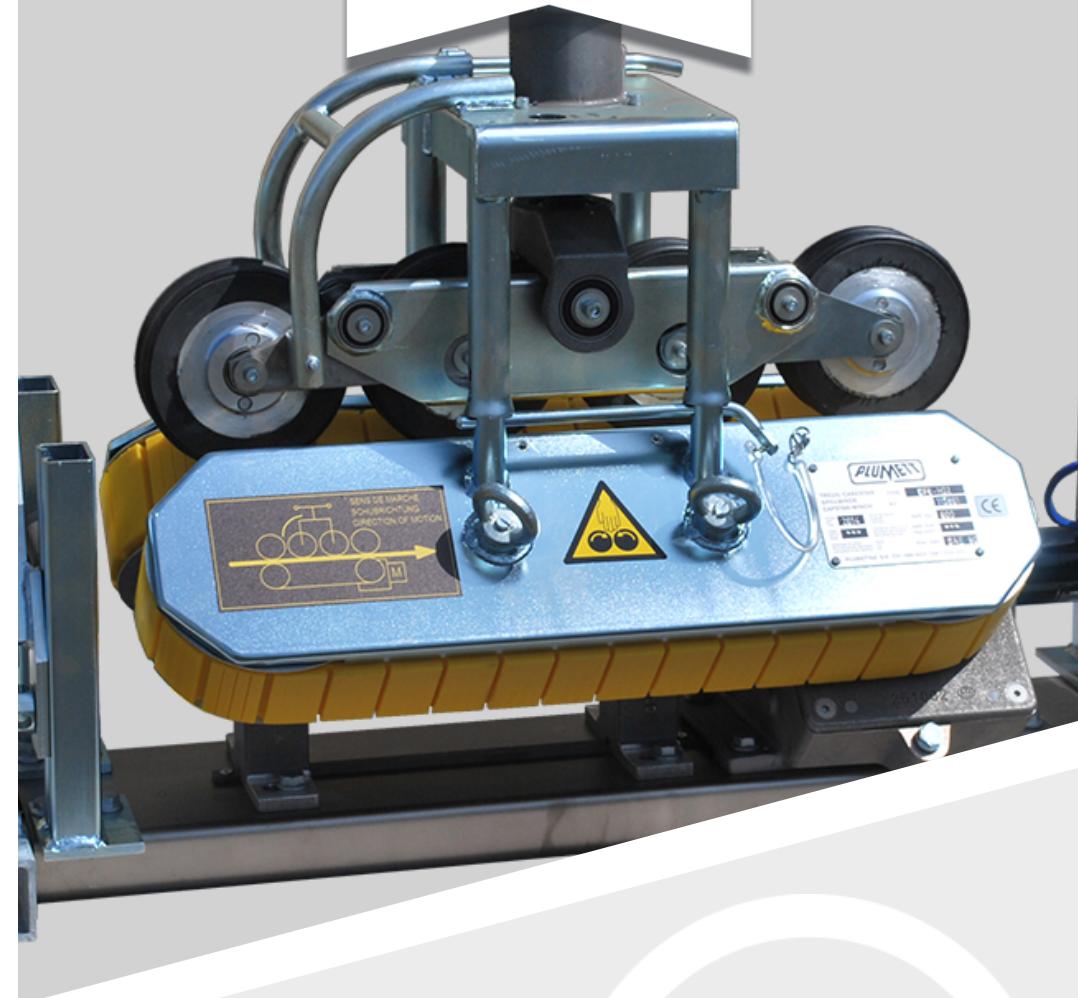

PLUMETT | CABLE FEEDER DF 6

WITH ITS COMPACT HYDRAULIC DRIVE, THE CABLE FEEDER SERIES PUSH CABLES
IN TRADITIONAL INFRASTRUCTURE AS TRENCHES, DUCTS OR TUNNELS.



www.plumettaz.com

Plumettaz S.A. | Route de la Gribannaz 7 | 1880 Bex - Switzerland
T +41 24 463 06 06 | info@plumettaz.com

Standard equipment:

1 operation and maintenance manual

Standard version	Cable feeder	Cable feeder	Cable feeder	Cable feeder	Cable feeder	Cable feeder
Type	DF6-H02 HB	DF6-H02 HE	DF6-H02 HD	DF6-H02 XL HD	DF6-H02 XL HB	DF6-H02 XL HE
Cable dia. [mm]	25-130	25-130	25-130	55-160	55-160	55-160
Drive unit	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Pushing force [N]	6000	6000	6000	6000	6000	6000
Max. speed [m/min]	18	17	18	18	18	17
Hydraulic power pack, type of engine	Honda Gasoline GX270	Electric 112 M	Hatz Diesel 1B30	Hatz Diesel 1B30	Honda Gasoline GX270	Electric 112 M
Hydraulic power pack, engine, max. power [kW]	6.3	4.0	5.0	5.0	6.3	4.0
Hydraulic power pack, engine, max. speed rpm [min-1]	3600	2875	3600	3600	3600	2875
Hydraulic power pack, pump, delivery rating [l/min]	14.5	14	14.5	14.5	14.5	14
Hydraulic power pack, pump, hydraulic pressure [bar]	150	150	150	150	150	150
Current supply [V]	-	3x 400	-	-	-	3x 400
Length [mm]	1155	1155	1155	1155	1155	1155
Width [mm]	380	380	380	404	404	404
Height [mm]	697-832	697-832	697-832	741-876	741-876	741-876
Weight of machine [kg]	102-106	102-106	102-106	108	108	108
Total weight [kg]	172-176	181-185	187-191	193	178	187

Specifications are subject to change without notice