


Multi-duct accessories,
for the installation of microduct bundles



Lubricator L18,
for the continuous lubrication of cables for a
better Jetting performance

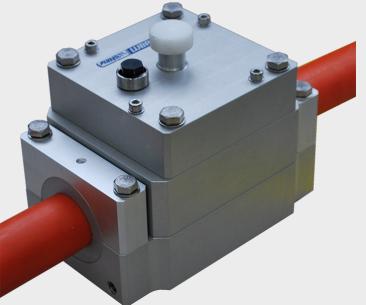

Figaro / Figarino,
intermediate cable storage system, avoiding
figure of 8



Y-connector,
for the installation of cable into an occupied
duct



PLUMETT MINIJET™

THE MINIJET™ PROVIDES THE LARGEST FLEXIBILITY TO THE MARKET. WITHIN YOUR
FLEET, MOST JOB FIND A PATH TO ACHIEVEMENT.



www.plumettaz.com

Plumettaz S.A. | Route de la Gribannaz 7 | 1880 Bex - Switzerland
T +41 24 463 06 06 | info@plumettaz.com

MAIN ACCESSORIES

Standard equipment:

1 box for the MiniJet / 1 box for tools, inserts, wear parts and consumables (seals, lubricant, etc.) / 1 set of tools / 1 speed and distance indicator / 1 air hose with quick release coupling
 Mody to connect to compressor / 2 belt V (Poly-V) / 1 bottle of lubricant Jetting Lube / 1 bottle of lubricant Micro Jetting Lube / 1 operation and maintenance manual

Standard version	MiniJet with pneumatic drive	MiniJet with hydraulic drive
Type	P02	H02
Cable dia. [mm]	4-16	4-16
Duct OD [mm]	7-42	7-42
Drive unit	Pneumatic	Hydraulic
Max. air consumption of motor [m ³ /min]	0.5 (at 4 bar)	-
Pushing force [N]	0-300	0-500
Linear pressure on cable [N/cm]	0-100	0-100
Max. speed [m/min]	125	125
Hydraulic power pack, type of engine	-	Honda Gasoline GX200
Hydraulic power pack, engine, max. power [kW]	-	4.1
Hydraulic power pack, engine, max. speed rpm [min ⁻¹]	-	3600
Hydraulic power pack, pump, delivery rating [l/min]	-	17
Hydraulic power pack, pump, hydraulic pressure [bar]	-	70
Max. air pressure [bar]	16	16
Max. water pressure [bar]	25	25
Dimension of apparatus l x w x h [mm]	518 x 372 x 299	518 x 372 x 298
Dimension of apparatus with case l x w x h [mm]	620 x 420 x 340	620 x 420 x 340
Dimension of tools and accessories case l x w x h [mm]	620 x 420 x 280	620 x 420 x 280
Weight of machine [kg]	20.000	20.500
Total weight [kg]	39.300	105.000

Specifications are subject to change without notice



Hydrocab-080,
accessory for cable installation with
water (floating), 80 l/min



Air after-cooler,
to increase Jetting performances when
ambient temperature is over 20°C



Jetting Lube / Micro Jetting Lube,
lubricant improving Jetting performance



Sonic head,
for the installation of cables with low
stiffness